
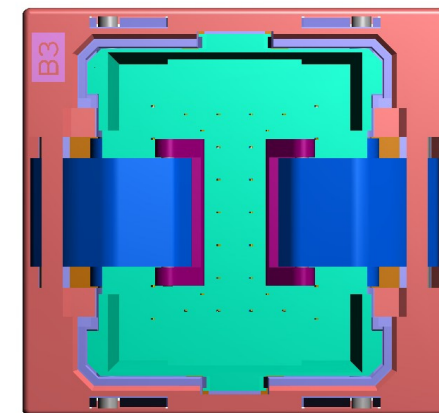


52ULGA Burn-in Socket


OKins Electronics

Product Features

- ✓ **Device : Flash memory**
- ✓ **Applicable PKG : 52pin ULGA**
- ✓ **Package Thickness : 0.71/1.00/1.47mm etc**
- ✓ **Socket Outline : 25x26mm**
- ✓ **Socket Height (in free position) : 17.0 ± 0.2 mm**
- ✓ **Socket Height (full stroke) : 14.00 ± 0.3 mm**
- ✓ **Applicable Pad Pitch : 0.5, 0.65, 0.8, 0.4mm**
- ✓ **Applicable Max. PKG Size : 14x18mm**
- ✓ **Applicable Min. PKG Size : 4x4mm**
- ✓ **Applicable Max. Pad Matrix : 23x31 (0.5mm Pitch)**
- ✓ **Lid Actuation Force : Max 3kg**
- ✓ **Contact Force : 12 ± 2 gm**
- ✓ **Contact Resistance : 100m Ω**

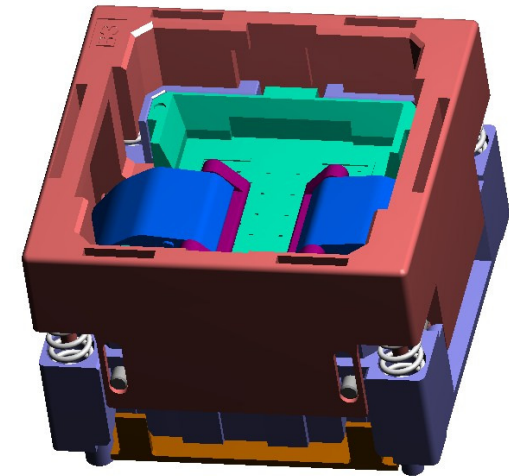

Contact

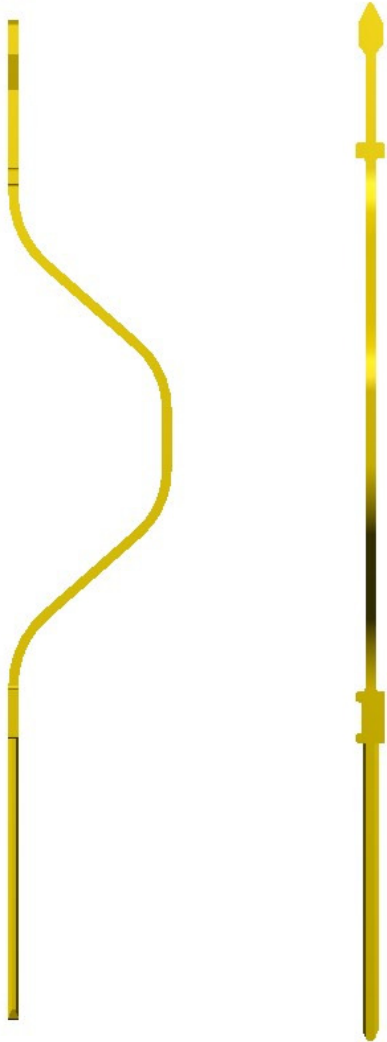

- ✓ **Bow Shape Buckle Beam**
- ✓ **Base Material : BeCu(C1720-1/2H)**
- ✓ **Thickness : $0.10\text{mm} \pm 0.008\text{mm}$**
- ✓ **Plate THK : $0.1 \sim 0.4\mu\text{m}$**
- ✓ **Contact Force : $12 \pm 2\text{gf}$**
- ✓ **Contact Resistance : $100\text{m}\Omega$**
- ✓ **Max Current Capacity : 0.6A**